


## 300W Eighth Brick Converter

### Features

- ◆ Standard Eighth Brick Footprint
- ◆ 36-75VDC Input
- ◆ 12V Nominal Output
- ◆ Through Hole Mounting
- ◆ 2250VDC Basic Isolation
- ◆ Digital adaptive control for fast transient response
- ◆ High Operating Efficiency (up to 94.6%)
- ◆ Constant Switching Frequency
- ◆ Baseplate Cooled

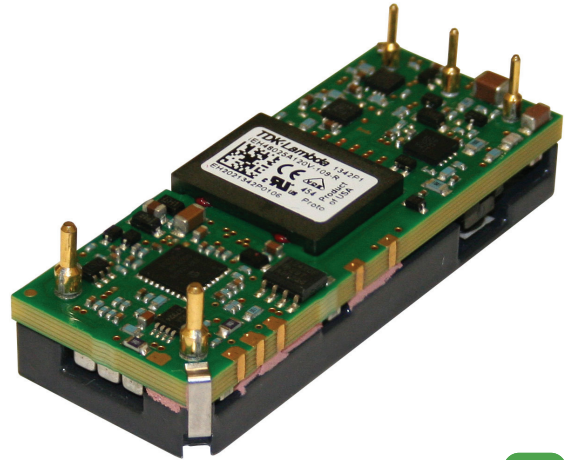

### Key Market Segments & Applications



Specifications			
Model		iEH300	
Nominal Output Voltage	VDC	10.8	12
Input Voltage Range	VDC	36-75*	
Ripple & Noise (max) (pk-pk) (1)	mV	150	120
Line Regulation (max)	mV	50	60
Load Regulation (max)	mV	100	60
Overload Protection Threshold (3)	A	36	29.5
Overvoltage Protection (Typ) (2)	VDC	13.1	14.8
Overtemperature Protection (3)	-	Yes	
Remote On / Off	-	Negative Logic	
Temperature (operating)	°C	-40 to 124	-40 to 130
Temperature (storage)	°C	-55 to 125	
Humidity (operating)	%RH	20-95% RH Non condensing	
Humidity (storage)	%RH	10-95% RH Non condensing	
Cooling	-	Conduction, convection or forced air (see detailed datasheet for derating)	
Isolation Voltage	VDC	2250VDC Input to Output, 1500VDC Input to Baseplate	
Vibration (non operating)	-	5-50Hz @ 0.5g (4.9m/s <sup>2</sup> ), and 50-500Hz @ 1.5g (14.7m/s <sup>2</sup> ) per Bellcore TR-EOP-000063-5.4.4	
Shock	-	196.1m/s <sup>2</sup>	
Safety Agency Approvals	-	UL60950 (US and Canada), CB scheme IEC 60950-1 (2nd edition) AM1, CE Mark EN 60950-1/A12	
Weight (max)	g	50	
Size	mm/in.	50.42 x 22.86 x 12.70 / 2.02 x 0.9 x 0.49	
Warranty	yrs	3 Years	

\*When operating below 40V input, the module will operate, but load regulation may be out of specification.

(1) See website for detailed specification and test methods.

(2) See model selector


(3) Non-Latching

## Model Selector

Model	Input Voltage (V)	Output Voltage (V)	Drop Share	Max. Curr. (A)	Max. Output Power (W)	Base Plate	OVP	Efficiency at Full Load (%)	Pin Length
iEH48028A108V-103-R	36-75	10.8	No	28	300	Yes	Non-Latch	94	0.145
iEH48028A108V-109-R	36-75	10.8	No	28	300	Yes	Latch	94	0.190
iEH48025A120V-003-R	36-75	12	No	25	300	No	Non-Latch	94.6	0.145
iEH48025A120V-103-R	36-75	12	No	25	300	Yes	Non-Latch	94.6	0.145
iEH48025A120V-107-R	36-75	12	No	25	300	Yes	Non-Latch	94.6	0.190
iEH48025A120V-109-R	36-75	12	No	25	300	Yes	Latch	94.6	0.190

Preferred model

## Outline Drawing

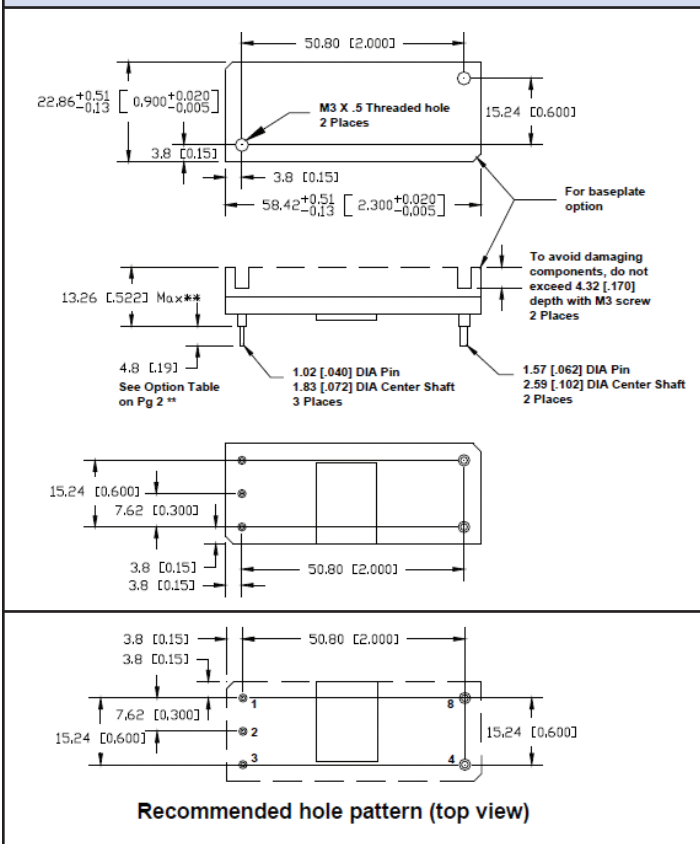

## Pinout

PIN	Function	PIN	Function
1	Vin (+)	5	none
2	On / Off	6	none
3	Vin (-)	7	none
4	Vo (-)	8	Vo (+)

For Additional Information, please visit [us.tdk-lambda.com/lp/products/ieh-series.htm](http://us.tdk-lambda.com/lp/products/ieh-series.htm)

