
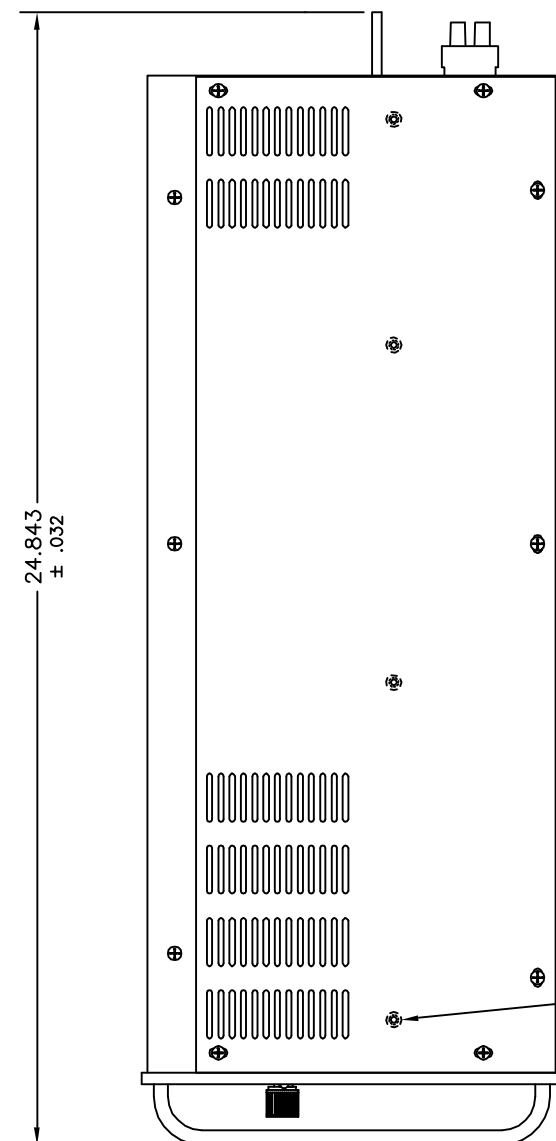
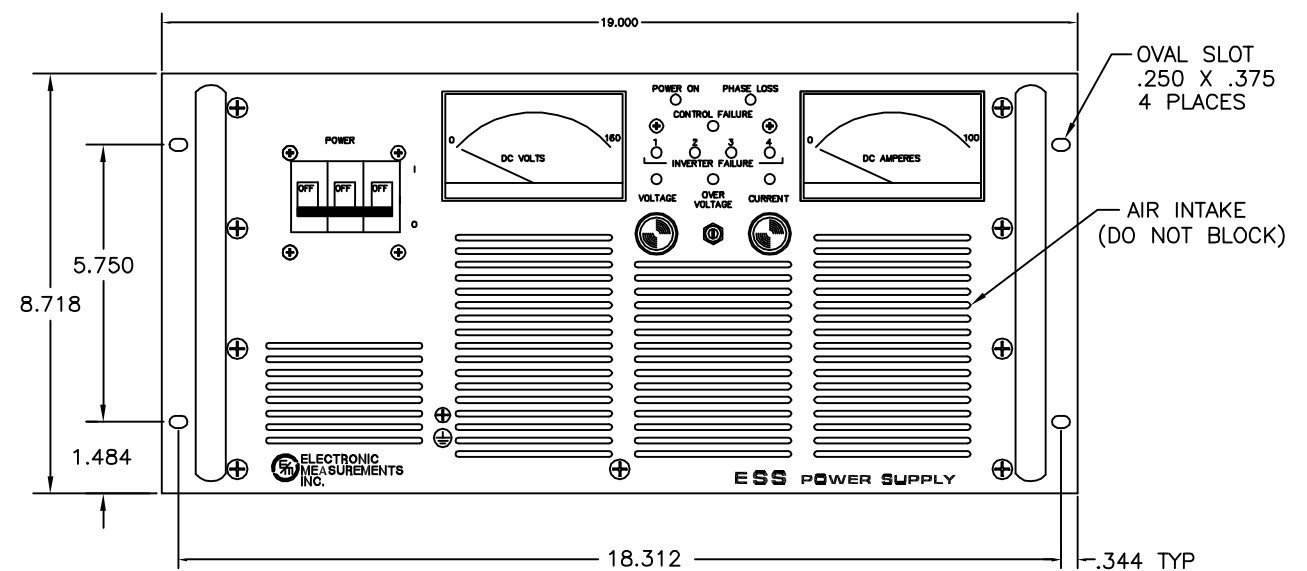


APPLICATION			LTR	E.C.O. NO.	BY	APP.
USED ON	NEXT ASSY.	QTY.	A	REL TO MFG.	3/94	WJW
			B	ADDED DIMS/REAR VIEW	7/97	
			C	ECO16952	12/18/97	RHS


.422 DIA  
2 PLACES

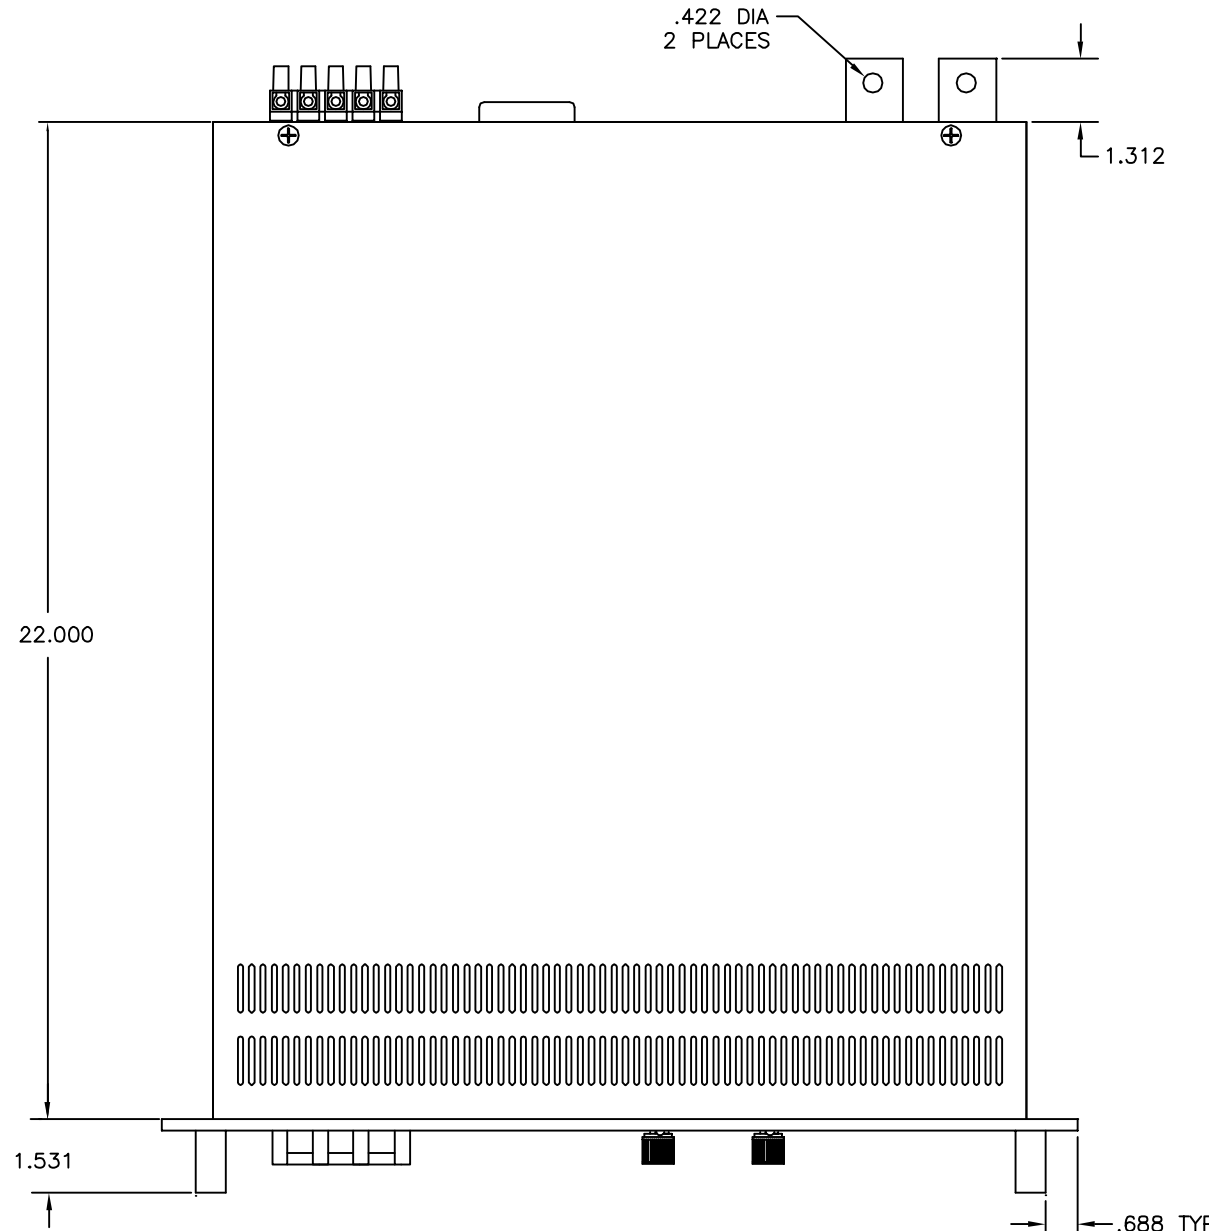

- STANDARD FEATURES:
1. U/L RECOGNIZED INPUT CIRCUIT BREAKER.
  2. ANALOG VOLTMETER AND AMMETER.
  3. VOLTAGE AND CURRENT ADJUST.
  4. VOLTAGE AND CURRENT MODE LAMP INDICATORS.
  5. INTERNAL LINE FILTER.
  6. PWM CONTROL.
  7. REMOTE TURN ON AC,DC, OR DRY SWITCH
  8. P/S WEIGHT = 107 LBS.

AC INPUT CHART	
TB1	3ø
1	L1 INPUT
2	L2 INPUT
3	L3 INPUT
4	N NEUTRAL
5	GROUND

(USED ON 380VAC INPUT ONLY)

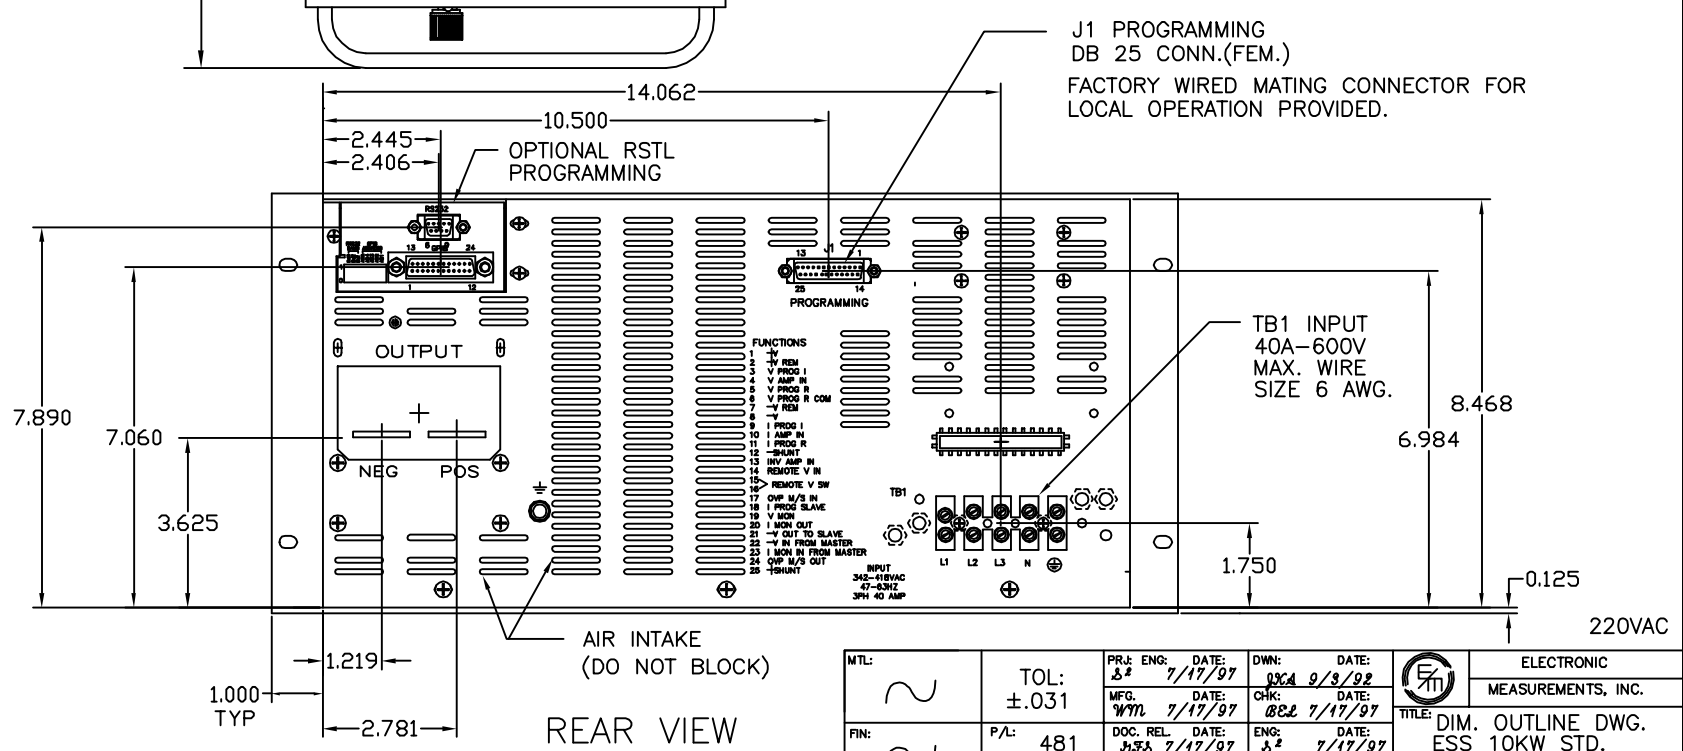

MTL:	TOL: ±.031	PRJ: ENG: DATE: 7/17/97	DWN: DATE: 9/3/92	ELECTRONIC MEASUREMENTS, INC.
FIN:	P/L: 481	MFG. DATE: 7/17/97	CHK: DATE: 8/22/97	
	SCALE: NONE	DOC. REL. DATE: 7/17/97	ENG: DATE: 7/17/97	TITLE: DIM. OUTLINE DWG. ESS 10KW STD.
		APP: DATE: 7/17/97	DWG. NO. 02-481-009	REV. C